


# BIS Nylon Plugs

fixing to concrete, brick



## Features and Benefits

- for light and medium duty applications
- high pull out values
- four-side expansion for secure hold
- four fins guarantee anti-rotation during installation
- sturdy, ensures no distortion when hammering in, ideally suited for through fix installation
- centric screw guide prevents break out of the screw during installation
- material: PA (polyamide), grey

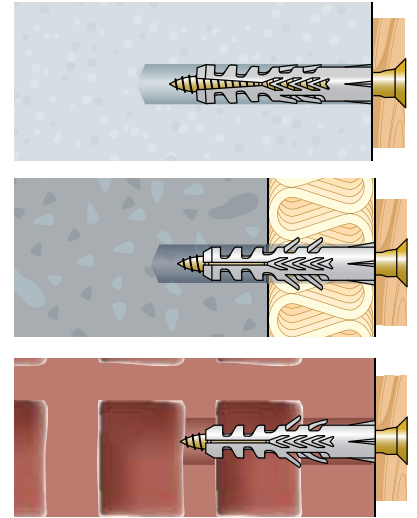

Part No.	L	HØ (mm)	Fa,z (N)	Pack 1	Pack 2
610 0 005	25 mm	5	230	100	6.000
610 0 006	30 mm	6	310	100	6.000
610 0 008	40 mm	8	340	100	2.700
610 0 010	50 mm	10	770	50	1.350
610 0 012	60 mm	12	1.550	25	675
610 0 014	70 mm	14	4.150	20	540

Max. allowed load (Fa,z) in concrete with maximum screw diameter.

