


Reflex V

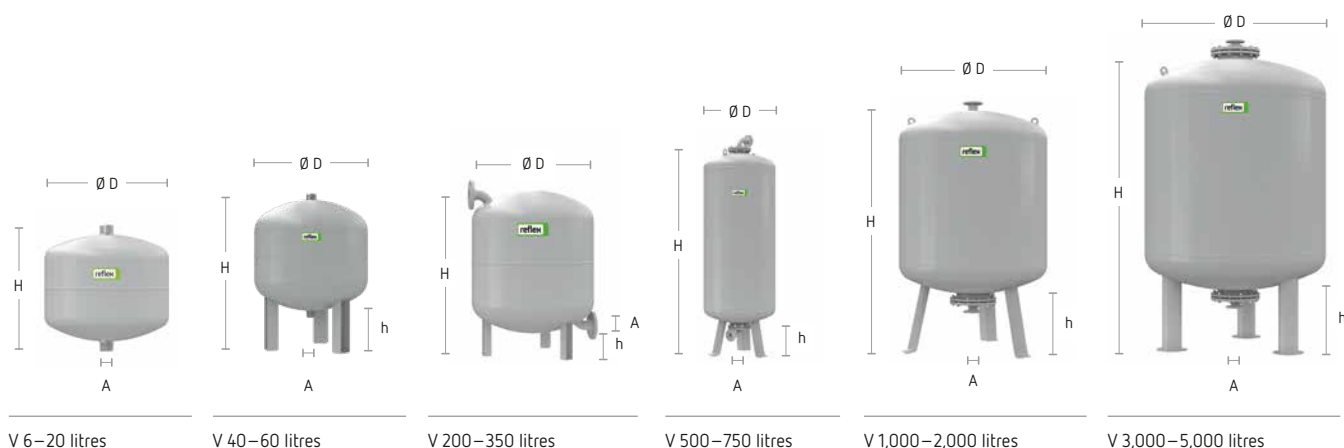

Technical features

- Auxiliary vessel
- Up to 20 litres with fixing bracket, from 40 litres with feet
- No bladder
- Required for systems with return temperatures > 70 °C or in cooling systems with temperatures < 0 °C
- Approved in accordance with pressure equipment guidelines 2014/68/EU
- May also be used as buffer tank
- Special container > 10 bar/> 120 °C available on request
- Long-lasting epoxy resin coating
- Max. permissible system temperature 110 °C or 120 °C (depending on design and size)

| | Model | Product no. | VPE | Colour | Ø D [mm] | Height H [mm] | Height h [mm] | Connection A | Weight [kg] |
|------------------|---------|-------------|------|--------|----------|---------------|---------------|--------------|-------------|
| 6 bar 120 °C | V 500 | 8852800 | - | grey | 750 | 1,717 | 208 | DN 40/PN 6 | 160.0 |
| | V 750 | 8851800 | - | grey | 750 | 2,323 | 208 | DN 40/PN 6 | 205.0 |
| | V 1000 | 8851905 | - | grey | 1,000 | 2,020 | 305 | DN 65/PN 6 | 310.0 |
| | V 1500 | 8852305 | - | grey | 1,200 | 2,020 | 305 | DN 65/PN 6 | 445.0 |
| | V 2000 | 8852405 | - | grey | 1,200 | 2,478 | 305 | DN 65/PN 6 | 545.0 |
| | V 3000 | 8852505 | - | grey | 1,500 | 2,556 | 337 | DN 65/PN 6 | 775.0 |
| | V 4000 | 8853405 | - | grey | 1,500 | 3,131 | 337 | DN 65/PN 6 | 1,060.0 |
| | V 5000 | 8854805 | - | grey | 1,500 | 3,666 | 337 | DN 65/PN 6 | 1,095.0 |
| 10 bar 110 °C | V 6 | 8303100 | 96 | grey | 206 | 244 | - | R ¾" | 2.0 |
| | V 12 | 8303200 | 72 | grey | 280 | 244 | - | R ¾" | 3.0 |
| | V 20 | 8303300 | 42 | grey | 280 | 360 | - | R ¾" | 3.5 |
| | V 40 | 8303400 | 18 | grey | 409 | 562 | 113 | R 1" | 7.8 |
| | V 60 | 8303500 | 12 | grey | 409 | 732 | 172 | R 1" | 23.0 |
| | V 200 | 8303600 | - | grey | 634 | 901 | 142 | DN 40/PN 16 | 43.0 |
| | V 300 | 8303700 | - | grey | 634 | 1,201 | 142 | DN 40/PN 16 | 48.0 |
| | V 350 | 8303800 | - | grey | 634 | 1,341 | 142 | DN 40/PN 16 | 51.0 |
| 10 bar 120 °C | V 1000 | 8400205 | - | grey | 1,000 | 2,055 | 286 | DN 65/PN 16 | 560.0 |
| | V 1500 | 8400305 | - | grey | 1,200 | 2,045 | 284 | DN 65/PN 16 | 780.0 |
| | V 2000 | 8400405 | - | grey | 1,200 | 2,505 | 284 | DN 65/PN 16 | 940.0 |
| | V 3000 | 8400505 | - | grey | 1,500 | 2,600 | 313 | DN 65/PN 16 | 1,405.0 |
| | V 4000 | 8400605 | - | grey | 1,500 | 3,178 | 313 | DN 65/PN 16 | 1,930.0 |
| V 5000 | 8400705 | - | grey | 1,500 | 3,713 | 313 | DN 65/PN 16 | 2,015.0 | |